


PRODUCTS INSTALLATION INSTRUCTIONS

MODEL: F156101C-A-ENG
Description: Single Lever Basin Mixer Tall



NO.	NAME	QTY.
1	Handle	1
2	Dome	1
3	Nut	1
4	O-Ring D37XD2	1
5	Cartridge Shell	1
6	Cartridge	1
7	Cartridge Base	1
8	O-Ring D27XD2.65	1
9	Body	1
10	O-Ring D37.5XD2.5	1
11	Shank M8X90	1
12	Rubber Washer	1
13	Washer	1
14	Nut	1
15	Braided Hose(Cold)	1
16	Braided Hose(Hot)	1
17	Set Screw	1
18	Plug	1
19	Allen Key 2.5	1
20	Aerator	1

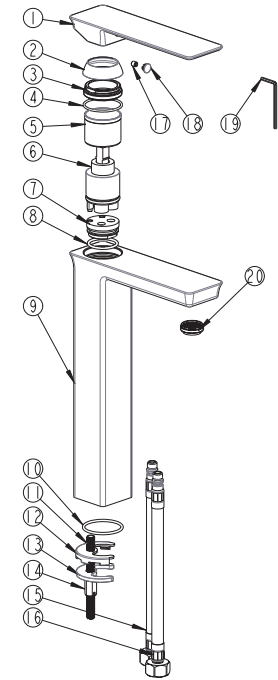


A

INSTALLATION DIMENSION

Unit:mm

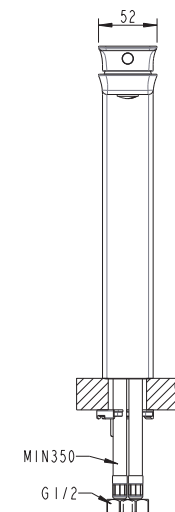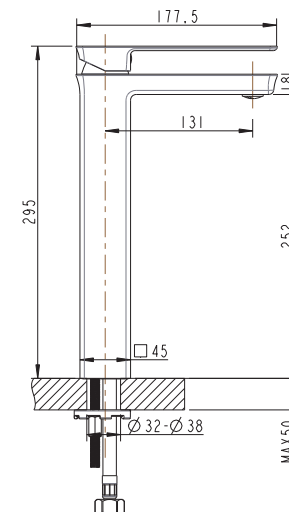


B HELPFUL TOOLS




! Points for attention before installation

- Before installing the new mixer, it is essential that you thoroughly flush through the supply pipes in order to remove any remaining swarf, solder or other impurities. Failure to carry out this simple procedure could cause problems or damage to the workings of the mixer.
- Work water pressure: 0.5-5kgf/cm² (Including cold and hot).
- If the pictures and statements in the 'Installation Specifications' is unconfirmed with practicality, please take practicality as standard.

C INSTALLATION STEP

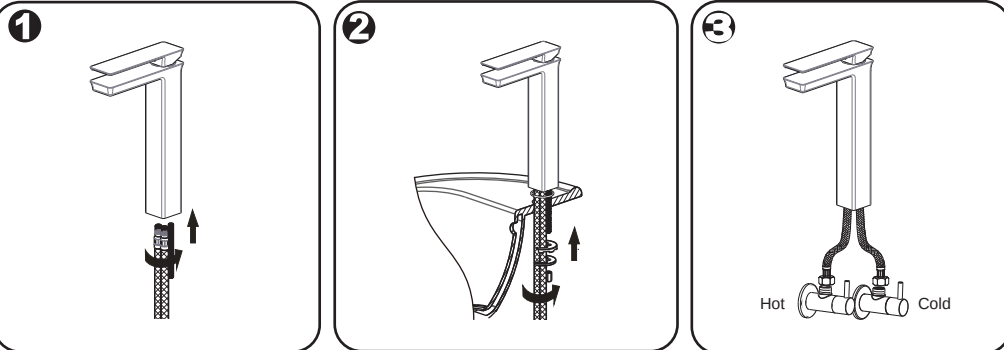

D FAUCET OPERATION

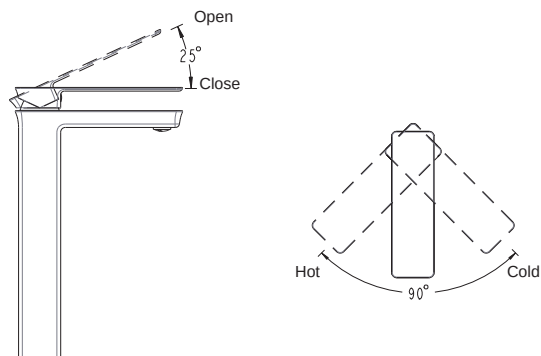

E MAINTENANCE

CAUTION: Always turn water OFF before removing existing or disassembling the faucet. Open faucet handles to relieve water pressure and insure that complete water shut-off has been accomplished.

To keep the surface clean and bright, please clean the faucet regularly, please abide by the following procedures:

1. Use rinsing water and soft cloth, clean bilge and bilge membrane on the surface to the best of the abilities.
2. Cleaned the residua with the following cleansers only.
 - ☒ Soft liquid cleanser.
 - ☒ Colorless glass cleanser, totally soluble powder cleanser without abrasive capability.(Mixed by instructions.)
 - ☒ No abrasive cleansers waxes.
 - ☒ Never use cleanser, emery cloth or handkerchief which can rub.
 - ☒ Never use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome.
3. After cleaning, use rinsing water to clean all cleanser immediately and drying with a soft cotton cloth.
4. Carefully dismantle the aerator regularly, rinse under clean running water until any loose debris is cleared to avoid the influence to water outflow.

F SPECIAL STATEMENT

The products installation instruction is written in accordance with the latest product information, following the sustainable development strategy of the Company, to improve continually the produce's specification, performance etc., subject to change without notice. (The Company reserves the right to interpret)